

K9 tail boot and neck options.

Tail Boot

Front steering rack boots make an excellent tail boot for K9 this one closely approximates one type of boot fitted to K9 Mk3 in the TV series.

It's from Kelpro an aftermarket boot supplier you could also use an OEM boot or get a second hand boot from the wreckers.

Model number SRB-048 fits-

Suits Impreza GC, GF 4/93 – 12/98 4cyl 1.6L

Suits Impreza GC, GD, GF 1/92 – 12/01 4cyl 1.8L.

Suits Impreza GC inc WRX turbo 1/92 – 12/00 4cyl 2.0L


Suits Impreza excl WRX 12/00 – 12/05 4cyl 2.0L

Suits Impreza excl WRX 10/01 – on 4cyl 2.5L

Cut boot to desired length and fit to body with an adaptor plate.



SRB-048

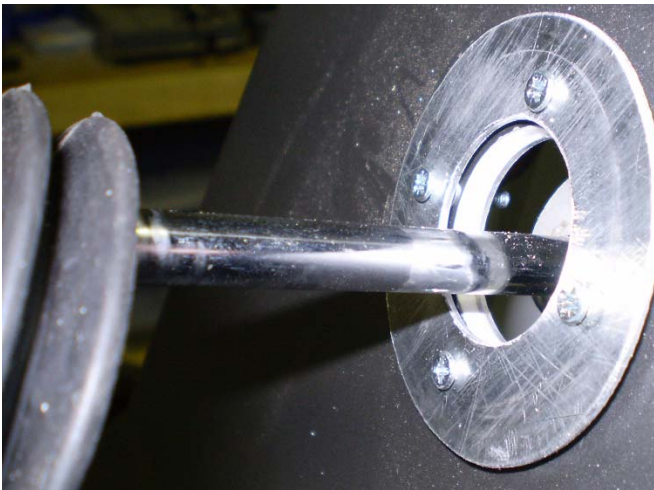

Tail

Telescopic back scratcher or telescopic FM antenna from an old analogue radio can be used for K9's tail.



If you use a back scratcher first cut the rubber grip off this will expose the 3 or 4mm thread at the base, remove scratcher part and form a 30mm loop to fit in end.

FM antenna just requires removal from the radio, don't throw away the screw at the end of the antenna you will need that.

Attach tail to the wag mechanism with a 3 or 4mm screw or in the case of the antenna the screw you didn't throw away.

Generally the last biggest segment is 9mm in diameter so this will make a tight fit on the 8mm boot end.

Neck

Eximo SpeedLoc Sunflex 127mm duct.

Not sure on the availability of this brand of flexible ducting worldwide but would assume other manufactures produce simular flexible ducting.




<https://www.eximo.com.au/sunflex/>



SunFlex

UV resistant light weight and very flexible thermoplastic rubber ducting

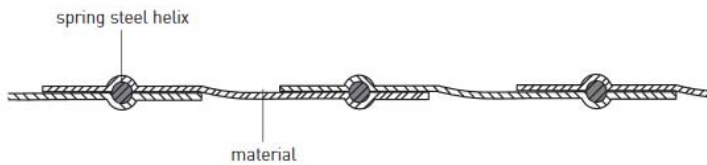

Technical Data

Further diameters available upon request.
Technical data are based on +20°C.

PRODUCT CODE	Weight kg/m	Bend Rad mm	Max work Pressure bar	Max Vacuum bar
SUNFLEX025	0.090	25	0.45	0.20
SUNFLEX032	0.140	30	0.40	0.20
SUNFLEX040	0.160	40	0.35	0.15
SUNFLEX052	0.210	50	0.35	0.10
SUNFLEX060	0.250	60	0.35	0.08

7.1 - SUNFLEX



Material
Thermoplastic rubber

Wall Thickness
0.4mm

Colour
Black

Single Length
10m rolls / cut lengths to order

Temperature Resistance
- 40° up to + 100° C

Applications
Suction of chemical fumes and gases
even under mechanical influence

Properties

- very good chemical resistance to fumes of acids and solvents
- UV and ozone resistant
- rot proofed
- withstands severe flexing